


DIN 3117 ISO

- Obrót śruby regulacyjnej w prawo zwiększa rozstaw szczęk
- Główna odgięta o 22,5 stopnia, ze skalą w mm i calach

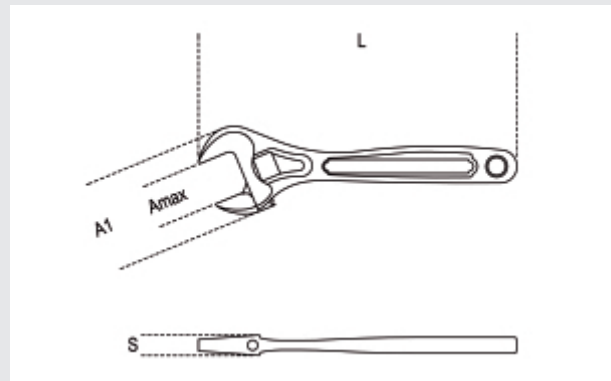

| art.      | L<br>mm | L<br>" | A max<br>mm | A1<br>mm | S<br>mm | g    |
|-----------|---------|--------|-------------|----------|---------|------|
| 001110010 | 100     | 4      | 15          | 33,0     | 9,5     | 60   |
| 001110015 | 150     | 6      | 24          | 49,0     | 11,9    | 165  |
| 001110020 | 200     | 8      | 28          | 62,0     | 14,0    | 325  |
| 001110025 | 250     | 10     | 34          | 70,0     | 16,0    | 505  |
| 001110030 | 300     | 12     | 35          | 84,0     | 18,0    | 790  |
| 001110038 | 380     | 15     | 45          | 97,0     | 20,0    | 1320 |
| 001110045 | 450     | 18     | 54          | 115,0    | 22,5    | 2043 |
| 001110060 | 600     | 24     | 62          | 136,0    | 28,0    | 3300 |