


DIN 3117 ISO

- Obrót śruby regulacyjnej w lewo zwiększa rozstaw szczęk
- Główna odgięta o 22,5 stopnia, ze skalą w mm i calach

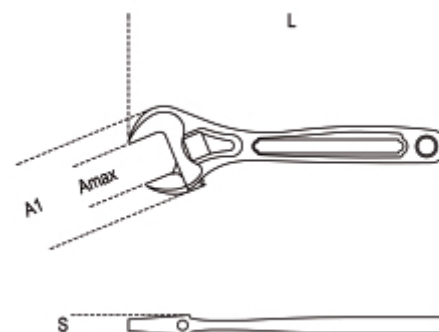

| art. | L mm | L " | A max mm | A1 mm | S mm | g |
|-----------|---------|--------|-------------|----------|---------|------|
| 001110210 | 100 | 4 | 15 | 33,0 | 9,5 | 64 |
| 001110215 | 150 | 6 | 24 | 49,0 | 11,9 | 124 |
| 001110220 | 200 | 8 | 28 | 62,0 | 14,0 | 283 |
| 001110225 | 250 | 10 | 34 | 70,0 | 16,0 | 473 |
| 001110230 | 300 | 12 | 35 | 84,0 | 18,0 | 680 |
| 001110238 | 380 | 15 | 45 | 97,0 | 20,0 | 1300 |
| 001110245 | 450 | 18 | 54 | 115,0 | 22,5 | 2480 |