

Wiha Classic T-handle.

The classic for high torques.



The handle design is such that the complete handle surface can be used, thus enabling optimum power transmission.

The ergonomic design of the Wiha T-handle that fits comfortably into the hand ensures optimum, symmetrical torque transmission from the hand through the blade to the screw. The extruded, angled end of the blade ensures that, even at the highest torques, the blade does not slip but gains a secure hold when either tightening or loosening the screw.

As the blades are subjected to high stresses, Wiha uses exclusively high-quality chrome-vanadium steels that are first subjected to a complex hardening procedure before being used in the wear-resistant blades.



A wide range of hex (metric and inch sizes), TORX® and TORX PLUS® blades, as well as hex drivers (metric and inch), ensures that the perfect tool is at hand for all conceivable applications. A colour-coding system for the handles facilitates the selection of the right blade.



*Red handle:
metric hex blades*

*Yellow handle:
inch hex blades*

*Green handle:
TORX® blades*

*Light green handle:
TORX PLUS® blades*


Thanks to the clear colour-coding system, you're sure to select the appropriate blade.



Wiha Classic T-handle.

- High torque transmission thanks to ergonomic handle
- Through hardened blades made of chrome-vanadium steel withstand every stress
- The angled blade end is injection-moulded into the T-handle and non detachable
- Hanging hole for workshop storage
- Made of high-quality plastic

For Allen screws (metric).

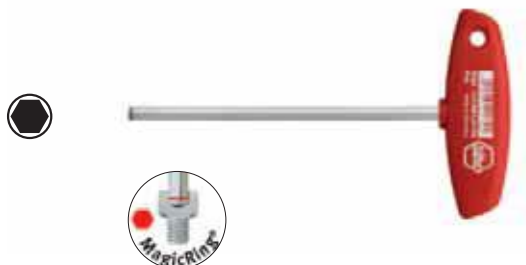**334R** Hex driver with T-handle.
With MagicRing®.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position.

Order-No.	●	↔	↔	↔	↔	↔
22168	3	100	126	80	26	10
22170	4	150	176	80	26	10
22172	5	150	182	100	32	10
22174	6	150	182	100	32	10
21960	8	200	232	100	32	10
21962	10	200	238	120	38	10

For Allen screws (metric).

**540** Ball end hex driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort, especially for screws that are difficult to access.
 Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	●	↔	↔	↔	↔	↔
04111	4	150	176	80	26	10
04108	5	150	182	100	32	10
04105	6	150	182	100	32	10
04099	8	200	238	100	32	10
04096	10	200	238	120	38	10

**334R VB** Hex driver set with T-handle.
With MagicRing®, in bench stand, 6 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: MagicRing® made from spring steel holds all standard screws in every position. Robust metal workbench holder to place on workbench or wall-mount. Tip diagrams printed to scale.

Order-No.	Series	↔
22096	334R VB	1
●	334R	3x100 4x150 5x150 6x150 8x200 10x200

Wiha Info

**Wiha MagicRing®.**

Thanks to the Wiha MagicRing®, inserting and removing screws is safe and easy, even in areas that are difficult to access.

Wiha Classic T-handle.

The classic for high torques.

For Allen screws (metric).



334 Hex driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Handle: Wiha Classic T-handle.

Application: For high torque transfer with minimal effort.

Order-No.	●	↔	⬢	↔	↔	↔	↔
00904	2	100	-	126	80	26	10
00905	2	200	-	226	80	26	10
00906	2.5	100	-	126	80	26	10
00907	2.5	200	-	226	80	26	10
00908	3	100	-	126	80	26	10
00909	3	150	-	176	80	26	10
00910	3	200	-	226	80	26	10
00911	3	350	5+	382	100	32	10
00912	4	100	-	126	80	26	10
00913	4	150	-	176	80	26	10
00914	4	200	-	226	80	26	10
00915	4	350	5+	382	100	32	10
00916	5	100	-	132	100	32	10
00917	5	150	-	182	100	32	10
00918	5	200	-	232	100	32	10
00919	5	350	-	382	100	32	10
00921	6	100	-	132	100	32	10
00922	6	150	-	182	100	32	10
00923	6	200	-	232	100	32	10
00924	6	350	-	382	100	32	10
00926	7	200	-	232	100	32	10
00928	8	100	-	132	100	32	10
00929	8	150	-	182	100	32	10
00930	8	200	-	232	100	32	10
00931	8	350	-	382	100	32	10
00933	10	100	-	138	120	38	10
00934	10	200	-	238	120	38	10
00937	12	200	-	238	120	38	5

+ Overlength with reinforced blade.



334 VB Hex driver set with T-handle.

In bench stand, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Handle: Wiha Classic T-handle.

Application: For high torque transfer with minimal effort.

Extra: Robust metal workbench holder to place on workbench or wall-mount.
Tip diagrams printed to scale.

Order-No.	Series	↔
00953	334 VB	1
●	334	2x100 2.5x100 3x100 4x150 5x150 6x200 8x200

For hex nuts.



336 Hex nut driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Handle: Wiha Classic T-handle.

Application: For high torque transfer with minimal effort.

Extra: Recess in shank to accommodate for long screws.

Order-No.	○	↔	↔	↔	↔	↔
00965	5.5	125	157	100	32	10
00966	6	125	157	100	32	10
00967	6	200	232	100	32	10
00968	7	125	157	100	32	10
00969	7	200	232	100	32	10
00970	7	350	382	100	32	10
00971	8	125	157	100	32	10
00972	8	200	232	100	32	10
00973	8	350	382	100	32	10
00974	9	125	157	100	32	10
00975	9	200	232	100	32	10
00977	10	125	157	100	32	10
00978	10	200	232	100	32	10
00979	10	230	262	100	32	10
00980	10	350	382	100	32	10
00982	11	125	157	100	32	10
00983	11	230	262	100	32	5
00985	12	125	157	100	32	10
00986	12	230	262	100	32	5
00988	13	125	157	100	32	10
00989	13	230	262	100	32	10
00990	13	350	382	100	32	10
00991	14	125	157	100	32	5
00993	15	125	157	100	32	5
00994	16	125	157	100	32	5
00995	17	125	157	100	32	5



338 Square nut driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Handle: Wiha Classic T-handle.

Application: For high torque transfer with minimal effort.

Extra: Recess in shank to accommodate for long screws.

Order-No.	○	↔	↔	↔	↔	↔
01005	6	125	157	100	32	10
01006	8	125	157	100	32	10
01007	10	125	157	100	32	10
01008	12	125	157	100	32	10

For hex screws and hex nuts (inch).

**334 Zoll** Hex driver with T-handle.**Inch sizes.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Handle: Wiha Classic T-handle.

Application: For high torque transfer with minimal effort.

Order-No.	⌀	↔	↔	↔	↔	mm	↔
02802	3/32	150	176	80	26	2.38	10
02803	7/64	150	176	80	26	2.78	10
02804	1/8	150	176	80	26	3.18	10
02805	9/64	150	176	80	26	3.57	10
02806	5/32	150	176	80	26	3.97	10
02807	3/16	150	182	100	32	4.76	10
02808	7/32	150	182	100	32	5.56	10
02809	1/4	150	182	100	32	6.35	10
02810	5/16	150	182	100	32	7.94	10
02811	3/8	150	188	120	38	9.53	10

**336 Zoll** Hex nut driver with T-handle.**Inch sizes.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.


Handle: Wiha Classic T-handle.

Application: For high torque transfer with minimal effort.

Extra: Recess in shank to accommodate for long screws.

Order-No.	⌀	↔	↔	↔	↔	mm	↔
02819	3/16	150	182	100	32	4.76	10
02820	1/4	150	182	100	32	6.35	10
02821	5/16	150	182	100	32	7.94	10
02822	3/8	150	182	100	32	9.53	10
02823	7/16	150	182	100	32	11.11	10
02824	1/2	150	182	100	32	12.70	10

For hex nuts and hex socket screws.

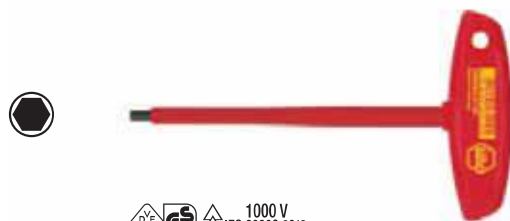

1000 V
IEC 60900:2012

334N VDE T-handle hex screwdriver.**Individually tested protective insulation 1,000 V AC, VDE and GS tested.**

Blade: Chrome-vanadium steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: VDE-insulated T-handle.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For allen screws.

Order-No.	⌀	↔	↔	↔	↔	↔
27928	4	150	176	80	26	5
27929	5	150	182	100	32	5
27930	6	150	182	100	32	5
27931	8	150	182	100	32	5



1000 V
IEC 60900:2012

336N VDE T-handle hex nut driver.**Individually tested protective insulation 1,000 V AC, VDE and GS tested.**

Blade: Chrome-vanadium steel, through hardened, black-finish.

Insulation moulded directly onto blade. Deep drawn socket.

Handle: VDE-insulated T-handle.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For external hex screws and hex nuts.

Order-No.	⌀	↔	↔	↔	↔	↔
27932	8	200	232	100	32	5
27933	10	230	262	100	32	5
27934	13	230	262	100	32	5
27935	17	230	268	120	38	5

Wiha Info**Colour-coding system:**

- **red:**
metric hex blades
- **yellow:**
inch hex blades
- **green:**
TORX® blades
- **light green:**
TORX PLUS® blades

Wiha Classic T-handle.

The classic for high torques.

For TORX® screws.



364 TORX® driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.
Extra: ChromTop® blade tip for the highest accuracy.

Order-No.	Icon	Series	Length	Width	Height	Weight	Material
01328	T9	100	4.0	126	80	26	10
01329	T10	100	4.0	126	80	26	10
01330	T15	100	4.0	126	80	26	10
01331	T15	200	5.5	226	80	26	10
01332	T20	100	4.0	132	100	32	10
01333	T20	200	5.5	232	100	32	10
01334	T25	100	4.5	132	100	32	10
01335	T25	200	5.5	232	100	32	10
01336	T27	100	5.5	132	100	32	10
01337	T27	200	5.5	232	100	32	10
01338	T30	100	6.0	132	100	32	10
01339	T30	200	6.0	232	100	32	10
01340	T40	100	7.0	132	100	32	10
01341	T40	200	7.0	232	100	32	10
01343	T45	250	8.0	288	120	38	10
01345	T50	250	9.0	288	120	38	10



364 VB TORX® driver set with T-handle. In bench stand, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.
Extra: ChromTop® blade tip for the highest accuracy.
Robust metal workbench holder to place on workbench or wall-mount.
Tip diagrams printed to scale.

Order-No.	Series	Material
01348	364 VB	1
Icon	364	T10x100 T15x100 T20x100 T25x100 T30x100 T40x200 T50x250

For TORX® and TORX PLUS® screws.



364R TORX® driver with T-handle. With MagicSpring®.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.
Extra: MagicSpring® made of stainless steel holds TORX® screws tight at various angles. ChromTop® blade tip for the highest accuracy. Blade made of hexagonal material is particularly capable of withstanding stress.

Order-No.	Icon	Series	Length	Width	Height	Weight	Material
27964	T9	100	4.0	126	80	26	10
27965	T10	100	4.0	126	80	26	10
27966	T15	100	4.0	126	80	26	10
27967	T20	100	4.0	132	100	32	10
27968	T25	100	5.0	132	100	32	10
27969	T27	100	6.0	132	100	32	10
27970	T30	100	6.0	132	100	32	10
27971	T40	100	8.0	132	100	32	10



364IP TORX PLUS® driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.
Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
ChromTop® blade tip for the highest accuracy.

Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.	Icon	Series	Length	Width	Height	Weight	Material
26953	9IP	100	4.0	126	80	26	10
26954	10IP	100	4.0	126	80	26	10
26955	15IP	100	4.0	126	80	26	10
26956	20IP	100	4.0	132	100	32	10
26957	25IP	150	4.5	182	100	32	10
26958	27IP	150	5.5	182	100	32	10
26959	30IP	150	6.0	182	100	32	10
26960	40IP	150	7.0	182	100	32	10