

Wiha SoftFinish® electric slimVario.

Maximum safety at minimum size.



product
design
award

2011



slimTECHNOLOGY



The perfect combination of functional bits, handy holders and maximum safety standards! The Wiha slimBits and SoftFinish® hand-held screwdriver were especially developed for mobile applications at various locations, e.g. building sites, solar systems or external switch cabinets. Perfect for the job with its light weight and compact geometry.



Its slim design and especially the protective insulation integrated into the bit means highly diverse applications. It can be used both as a mechanical and electrical fastening tool. The bit holder manufactured from metal parts gives the tool a long service life and an unusual level of ruggedness for everyday use. Added to that is an assortment of commonly used exchange bits and the pleasant SoftFinish® handle.

For all those unwilling to compromise in terms of safety and comfort.



slimTECHNOLOGY:
Up to 33% reduction of the bit diameter in the critical working area allows effortless access to low-lying fastening/spring elements.

Safety Notice:

For work in the area of live parts up to 1,000 V AC! 6 mm VDE exchange bits should be used only with the hand-held screwdriver supplied! When working with VDE tools, observe the national safety and accident prevention regulations!



Wiha SoftFinish® electric slimVario.

- **Slim - light - mobile**
Ideal for taking along
- **Durable**
Internal metal construction ensures bit holder doesn't wear
- **Gets everywhere**
Even in small apertures and low-lying fastening and spring elements
- **A firm hold**
Optimal interplay of bit and holder
- **Certified quality**
GS mark for inspected safety, one-off testing in a water bath at 10,000 V according to IEC 60900:2012

**Warning:**

6 mm slimBits only to be used in the slimVario bit holder and slimTorque VDE bit holder (VDE torque system).

**SoftFinish® electric slimVario. slimBits.**

1000 V
IEC 60900:2012

2831-00 SoftFinish® electric slimVario bit holder with handle and ClicFix, 6.0 mm.

Blade: Chrome-vanadium steel, through-hardened.
Insulation moulded directly onto blade.

Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
Only for 6 mm slimBits.

Application: Compact screwdriver together with slimBits.

Attention: Not for use with bit styles C 6.3 and E 6.3.

Order-No.	6	30	50	160	13	5
34577						



1000 V
IEC 60900:2012

2831-10 SoftFinish® electric slimBit, slotted.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Standards: Manufactured acc. to IEC 60900:2012.

Material: High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit and completely integrated into the blade in the lower area from size 4.0.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.
The slim form of the bit allows easy reaching of the screws below the finger and hand guards.

Attention: 6 mm slimBits only to be used in the slimVario bit holder and slimTorque VDE bit holder (VDE torque system).

Order-No.	2.5	3.0	4.0	5.5	6.5	75	0.4	0.5	0.8	1.0	1.2	6.0	max. Nm	no slim version	1
34578													0.4		
34579													0.6		
34580													2.5		
34581													5.5		
34582													5.5		



1000 V
IEC 60900:2012

2831-11 SoftFinish® electric slimBit, Phillips.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	PH1	PH2	75	6.0	3.8	5.5	1
34583							
34584							



1000 V
IEC 60900:2012

2831-12 SoftFinish® electric slimBit, Pozidriv.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	PZ1	PZ2	75	6.0	3.8	5.5	1
34585							
34586							

slimBits.

1000 V
IEC 60900:2012

2831-13 SoftFinish® electric slimBit, Xeno, for terminal screws (slotted/ Phillips).

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	SL/PH1	SL/PH2	75	6.0	3.8	5.5	1
34587							
34588							



1000 V
IEC 60900:2012

2831-14 SoftFinish® electric slimBit, Xeno, for terminal screws (slotted/Pozidriv).

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	SL/PZ1	SL/PZ2	75	6.0	3.8	5.5	1
34589							
34590							



1000 V
IEC 60900:2012

2831-15 SoftFinish® electric slimBit, TORX®.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	T8	T10	T15	T20	T25	75	6.0	1.3	3.8	5.0	5.5	no slim version	1
35506													
35507													
35508													
35509													
36071													



1000 V
IEC 60900:2012

2831-18 SoftFinish® electric slimBit, hexagon.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Standards: High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit and completely integrated into the blade in the lower area from size 2.5.

Order-No.	1.5	2	2.5	3	4	5	6	75	6.0	0.9	1.8	3.8	5.5	5.5	no slim version	1
37222																
37223																
37224																
37147																
37225																
37226																
37227																



1000 V
IEC 60900:2012

2831-17 SoftFinish® electric slimBit, square (Robertson).

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	Robertson 1	Robertson 2	2.3	2.8	75	6.0	5.5	1
35510								
35511								

Wiha SoftFinish® electric slimVario.

Maximum safety at minimum size.

slimBit pack.



1000 V
IEC 60900:2012

2831 B601 slimBit pack, slotted/ Phillips, 6-pcs.

Bits: High-quality chrome vanadium steel, through-hardened, bronzed. Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.

Application: For all work on or around electrical components up to 1,000 V AC.

Attention: 6 mm slimBits only to be used in the slimVario bit holder and slimTorque VDE bit holder (VDE torque system).

Order-No.	Series	
36088	2831 B601	1
①	2831-10	1x2,5 1x3,0 1x4,0 1x5,5
⊕	2831-11	1xPH1 1xPH2



1000 V
IEC 60900:2012

2831 B602 slimBit pack, slotted/ Pozidriv, 6-pcs.

Order-No.	Series	
36089	2831 B602	1
①	2831-10	1x2,5 1x3,0 1x4,0 1x5,5
⊕	2831-12	1xPZ1 1xPZ2



1000 V
IEC 60900:2012

2831 B603 slimBit pack, slotted/ Xeno (slotted/ Pozidriv), 6 pcs.

Order-No.	Series	
36090	2831 B603	1
①	2831-10	1x2,5 1x3,0 1x4,0 1x5,5
⊕	2831-14	1xSL/PZ1 1xSL/PZ2



1000 V
IEC 60900:2012

2831 B701 slimBit pack, hex, 7-pcs.

Order-No.	Series	
38997	2831 B701	1
⊙	2831-18	1x1,5 1x2 1x2,5 1x3 1x4 1x5 1x6

Sets.



1000 V
IEC 60900:2012

2831 T701 SoftFinish® electric slimVario starter pack, slotted/ Phillips, 7 pcs.

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability. Only for 6 mm slimBits.


Bits: High-quality chrome vanadium steel, through-hardened, bronzed. Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.

Bit holder: Individually tested protective insulation 1,000 V AC, VDE and GS tested. Wiha SoftFinish® electric multi-component handle with roll-off protection. Compact screwdriver together with slimBits.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated. The slim form of the bit allows easy reaching of the screws below the finger and hand guards.


Order-No.	Series	
34733	2831 T701	1
①	2831-10	1x3,0 1x4,0 1x5,5 1x6,5
⊕	2831-11	1xPH1 1xPH2
	2831-00	1xSoftFinish® electric slimVario Bithalter

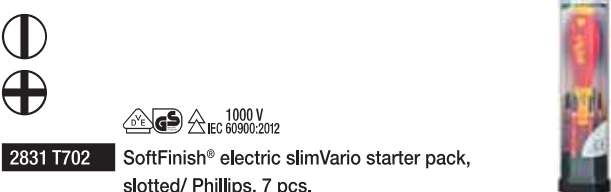

1000 V
IEC 60900:2012

2831 T702 SoftFinish® electric slimVario starter pack, slotted/ Phillips, 7 pcs.

Order-No.	Series	
34734	2831 T702	1
①	2831-10	1x2,5 1x3,0 1x4,0 1x5,5
⊕	2831-11	1xPH1 1xPH2
	2831-00	1xSoftFinish® electric slimVario Bithalter

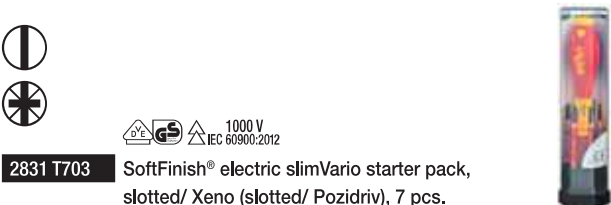

1000 V
IEC 60900:2012

2831 T703 SoftFinish® electric slimVario starter pack, slotted/ Xeno (slotted/ Pozidriv), 7 pcs.

Order-No.	Series	
34735	2831 T703	1
①	2831-10	1x3,0 1x4,0 1x5,5 1x6,5
⊕	2831-14	1xSL/PZ1 1xSL/PZ2
	2831-00	1xSoftFinish® electric slimVario Bithalter

**Safety Notice:**

When working with VDE tools, observe the national safety and accident prevention regulations!

**slimVario display.**

2831 T701 VB Display SoftFinish® electric slimVario.
Card display with 7 pcs.

Order-No.	Series	
35556	2831 T701 VB	1
①	2831-10	1x3,0 1x4,0 1x5,5 1x6,5
⊕	2831-11	1xPH1 1xPH2
	2831-00	1xSoftFinish® electric slimVario bit holder with handle



2831 T702 VB Display SoftFinish® electric slimVario.
Card display with 7 pcs.

Order-No.	Series	
35557	2831 T702 VB	1
①	2831-10	1x2,5 1x3,0 1x4,0 1x5,5
⊕	2831-11	1xPH1 1xPH2
	2831-00	1xSoftFinish® electric slimVario Bithalter



2831 T703 VB Display SoftFinish® electric slimVario.
Card display with 7 pcs.

Order-No.	Series	
35558	2831 T703 VB	1
①	2831-10	1x3,0 1x4,0 1x5,5 1x6,5
⊕	2831-14	1xSL/PZ1 1xSL/PZ2
	2831-00	1xSoftFinish® electric slimVario Bithalter

slimVario display.

2831 VB1 Display SoftFinish® electric slimVario.
Acryl glass display with 60 pcs.

Size: 22 x 19 x 35 cm (WxDxH).

Order-No.	Series	
37057	2831 VB1	1
	2831-00	3xSoftFinish® electric slimVario bit holder with handle
①	2831-10	5x2,5 4x3,0 4x4,0 4x5,5
⊕	2831-11	4xPH1 4xPH2
⊗	2831-12	4xPZ1 4xPHZ2
⊗	2831-14	8xSL/PZ1 8xSL/PZ2
	2831-15	4xT15 4xT20



Blades up to **33%**
narrower due to
integrated
insulation.

- Unlimited accessibility
- VDE and GS tested
- Maximum safety

Wiha SoftFinish® electric slimVario.

Maximum safety at minimum size.

SoftFinish® electric slimVario sets.



1000 V
IEC 60900:2012

2831 T704 slimVario starter set, 7-pcs.

Important slimBits in a bag.
Slotted/ Phillips.

Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.
Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
Only for 6 mm slimBits.

Bits: High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: Effortless access to low-lying fastening elements. Arranged clearly in a high quality, rugged and durable bag.

Order-No.	Series	
36069	2831 T704	1
	2831-00	1xSoftFinish® electric slimVario bit holder with handle
Ⓢ	2831-10	1x2.5 1x3.0 1x4.0 1x5.5
⊕	2831-11	1xPH1 1xPH2



1000 V
IEC 60900:2012

2831 T705 slimVario starter set, 7-pcs.

Important slimBits in a bag.
Slotted/ Pozidriv.

Order-No.	Series	
36070	2831 T705	1
	2831-00	1xSoftFinish® electric slimVario bit holder with handle
Ⓢ	2831-10	1x2.5 1x3.0 1x4.0 1x5.5
⊕	2831-12	1xPZ1 1xPZ2

2831 TL slimVario bag, empty.

Order-No.	Series	
36326	2831 TL	1



Safety Notice:

When working with VDE tools, observe the national safety and accident prevention regulations!

SoftFinish® electric slimVario sets.



1000 V
IEC 60900:2012

2831 T16 slimVario starter set, 16-pcs.

All commonly used slimBits in a bag.

Slotted/ Phillips/ Pozidriv/ Xeno/ TORX®.

Extra: Single-pole SoftFinish® voltage tester, 110-250 volts.

Order-No.	Series	
36068	2831 T16	1
	2831-00	1xSoftFinish® electric slimVario bit holder with handle
Ⓢ	255-11L	1xSingle-pole voltage tester, 110-250 volts
Ⓢ	2831-10	1x2.5 1x3.0 1x4.0 1x5.5
⊕	2831-11	1xPH1 1xPH2
⊕	2831-12	1xPZ1 1xPZ2
⊕	2831-14	1xSL/PZ1 1xSL/PZ2
⊕	2831-15	1xT10 1xT15 1xT20 1xT25



1000 V
IEC 60900:2012

2872 T10 slim selection set, 10-pcs.

VDE complete set with torque screwdriver, bit holder and slimBits.
Slotted/ Phillips/ Pozidriv.

Handle: VDE torque handle 1.0 - 5.0 Nm, steplessly adjustable.

Bit holder with SoftFinish® electric multi-component handle.

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
Only for 6 mm slimBits.

Bits: Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Application: For controlled fastening on live parts up to 1 000 V AC.

Extra: 100% safety from fastening with torque according to specification of manufacturer type-tested switching devices according to EN 60439-1. Effortless access to low-lying fastening elements. Arranged clearly in a high quality, rugged and durable bag.

Order-No.	Series	
36078	2872 T10	1
	2872	1xTorqueVario®-S VDE, model 1.0-5.0 Nm
	2831-00	1xSoftFinish® electric slimVario bit holder with handle
	2879	1xslimTorque VDE bit holder for 6 mm slimBits
	285-900	1xTorque-Setter
Ⓢ	2831-10	1x4.0 1x5.5
⊕	2831-11	1xPH1 1xPH2
⊕	2831-12	1xPZ1 1xPZ2